

Rafter Ceiling Frames

Specifications

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min. rPET
Weight	14mm, 0.49 lb./ft2 (±10%) 26mm, 0.98 lb./ft2 (±10%)
Compatible T-grid	Type : 15/16" Flat, 9/16" Flat Layout: Standard 24" x 24", Standard 24" x 24"
Standard Sizes	Height: 1", 2" H Width: 23" W Slat width: 3", 3.5", 3.8", 4.3", 5", 5.5", 7", 7.5" W Length: 24", 48" and 96" L

Sustainability



Made from 60% min. recycled content



Declare Red List Free (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Technical Data

Fire test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness test method	ISO 105-B02
Rating	6-7

Details

Lead time	3-6 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years*

*Conditions apply

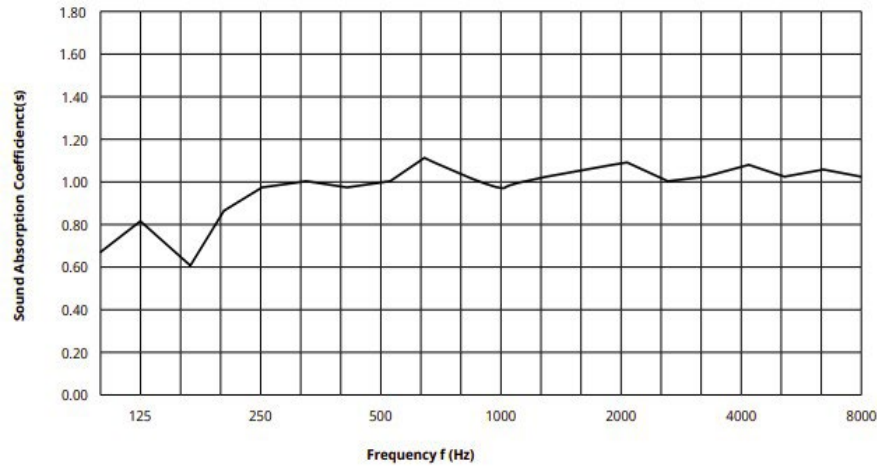
Acoustic Performance

Test Method
ASTM E795

Install Method
Type E-400



















Test Results
NRC 0.95
SAA 0.96

Rating Method
ASTM C423



Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.67	0.86	0.96	1.02	1.04	1.00	0.95

Premier Colourways

										
Peppercorn PE22	Currant CU59	Carrot CA08	Peach PE19	Mushroom MU75	Valentine VA70	Turmeric TU60	Wheat WH68	Kale KA12	Oregano OR18	Sencha SE58
										
Celery CE65	Eucalyptus EU71	Nori NO76	Pistachio PI25	Midnight MI16	Flint FL64	Granite GR62	Denim DE09	Loganberry LO77	Azure AZ05	Marine MA15
										
Stonewash ST72	Periwinkle PE23	Sea Salt SE57	Shiraz SH63	Piano Black PI24	Charcoal CH01	Slate SL27	Grey GR02	Platinum PL04	Milkyway MI74	Walnut WA56
										
Umber UM54	Amethyst AM69	Quartz QU67	Almond AL55	Ivory IV11	Pearl PE21	White WH12				


Can't find a colour?
We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.

How to Specify

1. Choose Slat Size & Clearance


Frames are available in 3, 4, 5 or 6 slats per frame. Once the number of slats per frame is selected there are 2 heights and widths to select from; the clearance between slats is predetermined based on the number of slats and the selected slat widths. Select the desired combination from the following:

No. Slats	Height	Width	Clearance
6	1"	3"	1"
6	1"	3.5"	0.5"
6	2"	3"	1"
6	2"	3.5"	0.5"
5	1"	3.8"	1"
5	1"	4.3"	0.5"
5	2"	3.8"	1"
5	2"	4.3"	0.5"
4	1"	5"	1"
4	1"	5.5"	0.5"
4	2"	5"	1"
4	2"	5.5"	0.5"
3	1"	7"	1"
3	1"	7.5"	0.5"
3	2"	7"	1"
3	2"	7.5"	0.5"

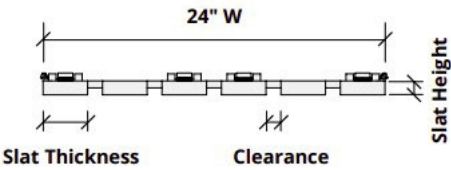

2. Choose Backer Panel

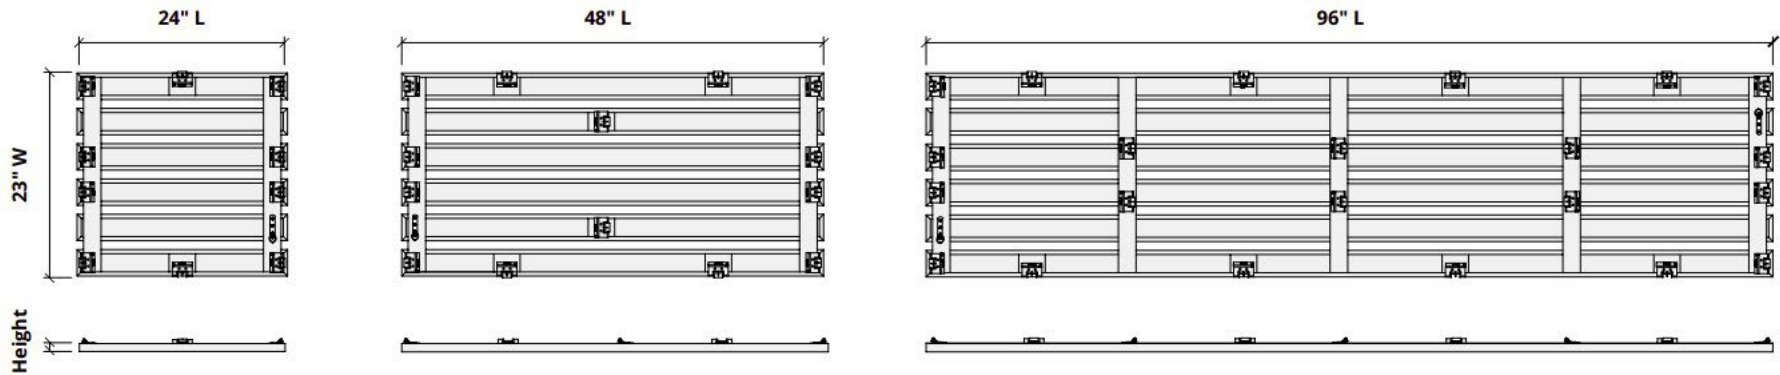Backer panels are available in three lengths.




Example shown with 6 slats per frame.
Clip spacing may differ. Product ships assembled.
Safety cable comes standard on all SoftenUp™
product lines. See installation guides for
additional details.

How to Specify


3. Choose Colourways

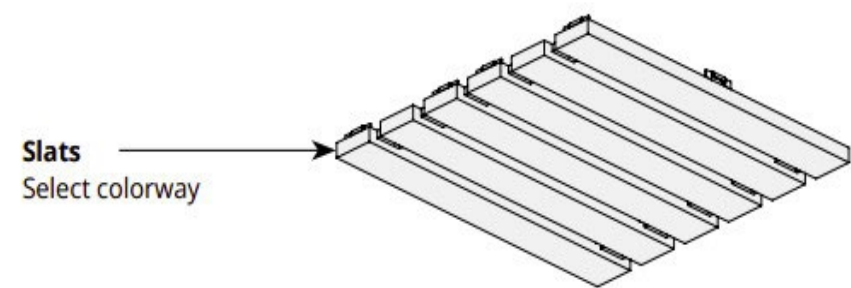See colorway choices on page 3.
If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).




Recommended Layouts

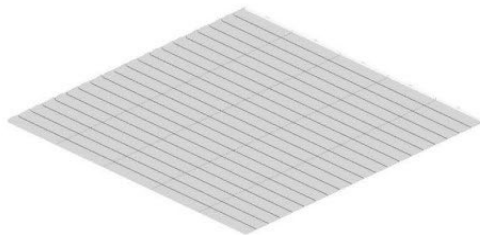Layout 1



Layout 2

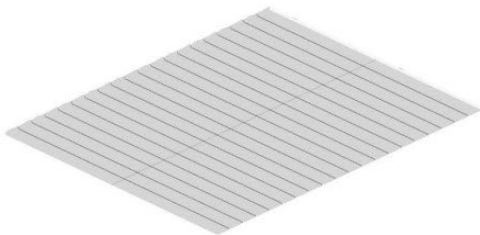

Layout 3

