

Rafter Ceiling Frames

Specifications

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min. rPET
Weight	14mm, 0.49 lb./ft2 (±10%) 26mm, 0.98 lb./ft2 (±10%)
Compatible T-grid	Type : 15/16" Flat, 9/16" Flat Layout: Standard 24" x 24", Standard 24" x 24"
Standard Sizes	Height: 1", 2" H Width: 23" W Slat width: 3", 3.5", 3.8", 4.3", 5", 5.5", 7", 7.5" W Length: 24", 48" and 96" L

Sustainability



Made from 60% min. recycled content



Declare Red List Free (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Technical Data

Fire test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness test method	ISO 105-B02
Rating	6-7

Details

Lead time	3-6 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years*

*Conditions apply

Acoustic Performance

Test Results
Pending product testing

WoodGrain Prints


									
Picket Fence WQ01	Boat Shed WQ02	Wine Barrel WQ03	Log Cabin WQ04	Barn Door WQ05	Loft WQ06	White Elm WQ07	French Bobbin WQ08	Charred Larch WQ09	Boardwalk WQ10
									
Antique Chest WQ11	Baltic Birch WQ12	White Oak WQ13	Weathered Slate WQ14	Nordic Plank WQ15	Natural Oak WQ16	European Larch WQ17	Teak WQ18	Fumed Oak WQ19	Black Walnut WQ20
									
Driftwood WQ21	Woodland Fog WQ22	Petrified Ash WQ23	Mountain Lodge WQ24	Mocha Legno WQ25	Scorched Timber WQ26	Espresso Oak WQ27	Shadow Oak WQ28	Knotty Spruce WQ29	Lyed Larch WQ30

How to Specify

1. Choose Slat Size & Clearance


Frames are available in 3, 4, 5 or 6 slats per frame. Once the number of slats per frame is selected there are 2 heights and widths to select from; the clearance between slats is predetermined based on the number of slats and the selected slat widths. Select the desired combination from the following:

No. Slats	Height	Width	Clearance
6	1"	3"	1"
6	1"	3.5"	0.5"
6	2"	3"	1"
6	2"	3.5"	0.5"
5	1"	3.8"	1"
5	1"	4.3"	0.5"
5	2"	3.8"	1"
5	2"	4.3"	0.5"
4	1"	5"	1"
4	1"	5.5"	0.5"
4	2"	5"	1"
4	2"	5.5"	0.5"
3	1"	7"	1"
3	1"	7.5"	0.5"
3	2"	7"	1"
3	2"	7.5"	0.5"

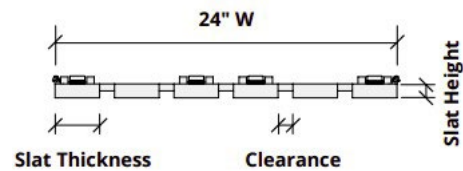

2. Choose Backer Panel

Backer panels are available in three lengths.

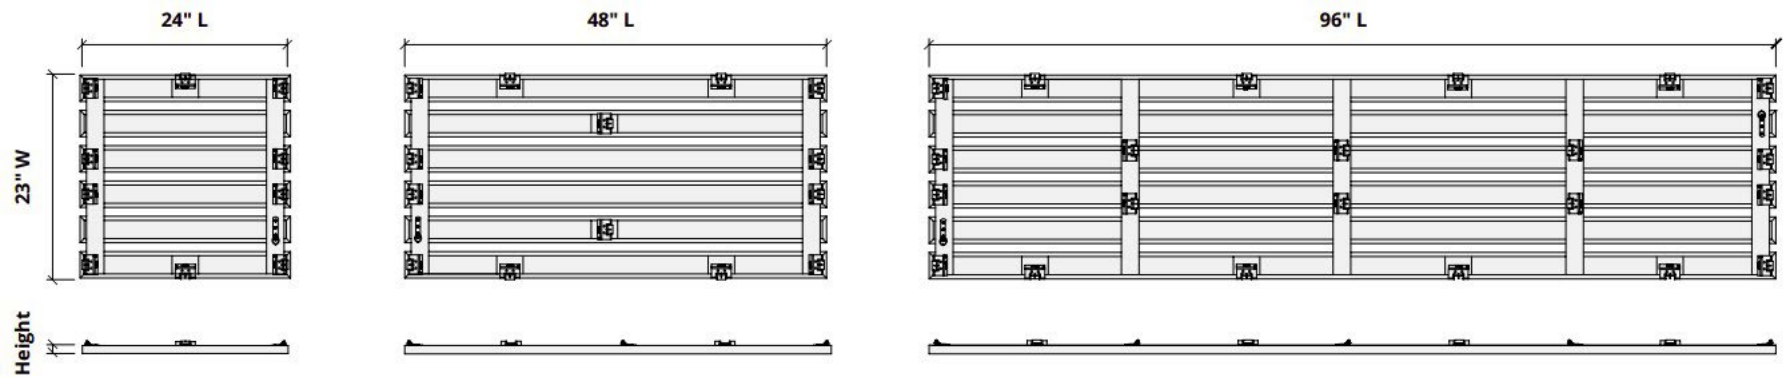


Example shown with 6 slats per frame.
Clip spacing may differ. Product ships assembled.
Safety cable comes standard on all SoftenUp™
product lines. See installation guides for
additional details.

How to Specify


3. Choose Colourways

See colorway choices on page 3.
If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).

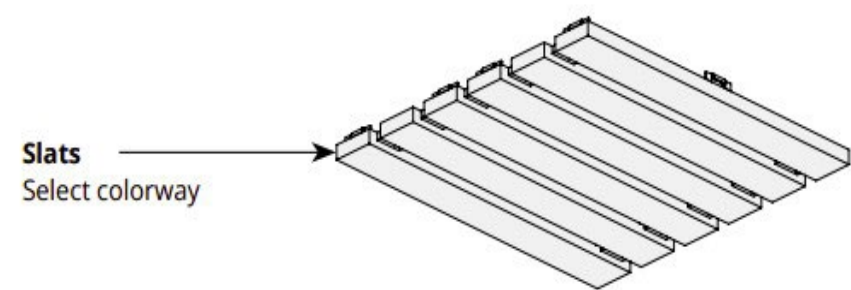


Recommended Layouts

Layout 1

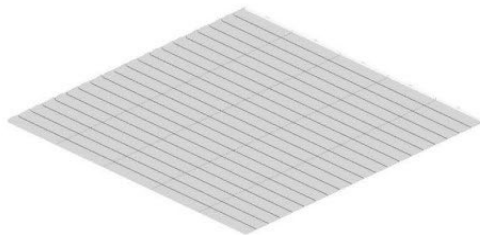

Layout 2

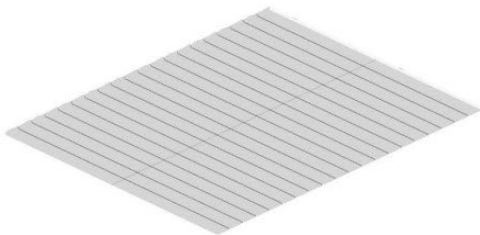

Layout 3

