



Cover,
Concealed

Specifications

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min. rPET
Weight	0.49 lb./ft2 (±10%) 0.98 lb./ft2 (±10%)
Standard Sizes	Width 24" W, 48" W Length 24", 48", 96" L 48", 96" L

Sustainability



Made from 60% min.
recycled content



Declare Red List Free
(3rd Party Verified)



Generated using
40% solar energy



Recyclable at
end of lifespan



Total VOC's less
than 0.5 mg/m³
(3rd Party Verified)



Technical Data

Fire test method	EN 13501-1: 2019
Classification	B-s1, d0
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness test method	ISO 105-B02
Rating	6-7


Details

Lead time	6-8 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years*

*Conditions apply

Acoustic Performance

Test method	ASTM E795-16
Installation method	A
Rating method	ISO 11654-1997
Test results	12mm 0.45, no air gap 0.85, 200mm air gap 24mm 0.60, no air gap

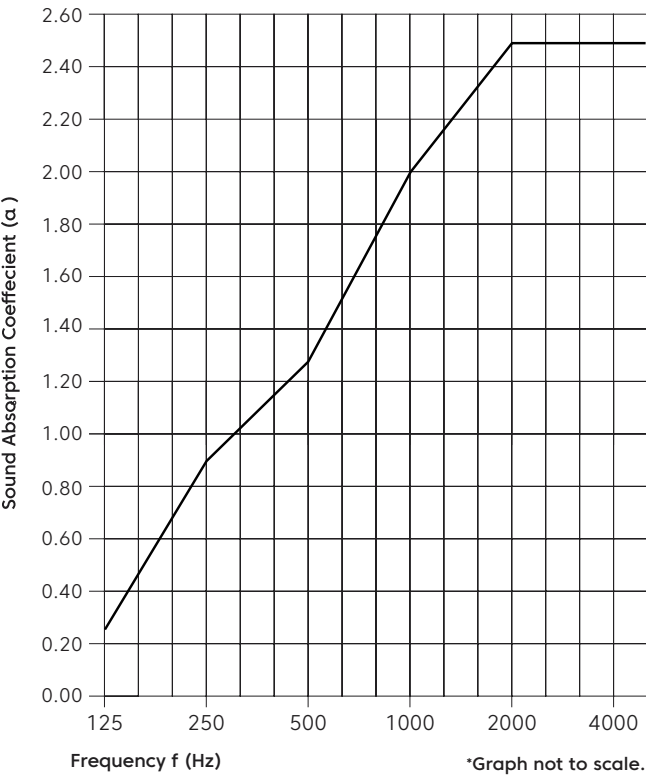

Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
α _s	0.26	0.86	1.25	2.02	2.49	2.49	1.65	Class A

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.

WoodGrain Prints



Picket Fence
WQ01



Boat Shed
WQ02



Wine Barrel
WQ03



Log Cabin
WQ04



Barn Door
WQ05



Loft
WQ06



White Elm
WQ07



French Bobbin
WQ08



Charred Larch
WQ09



Boardwalk
WQ10



Antique Chest
WQ11



Baltic Birch
WQ12



White Oak
WQ13



Weathered Slate
WQ14



Nordic Plank
WQ15



Natural Oak
WQ16



European Larch
WQ17



Teak
WQ18




Fumed Oak
WQ19



Black Walnut
WQ20



Driftwood
WQ21



Woodland Fog
WQ22



Petrified Ash
WQ23



Mountain Lodge
WQ24



Mocha Legno
WQ25



Scorched Timber
WQ26



Espresso Oak
WQ27



Shadow Oak
WQ28





Knotty Spruce
WQ29



Lyed Larch
WQ30

Sizes

Standard Widths	24, 48" W	Standard Length	24, 48, 96" L
Thickness	1/2", 12mm (±10%) 1", 24mm (±10%)		

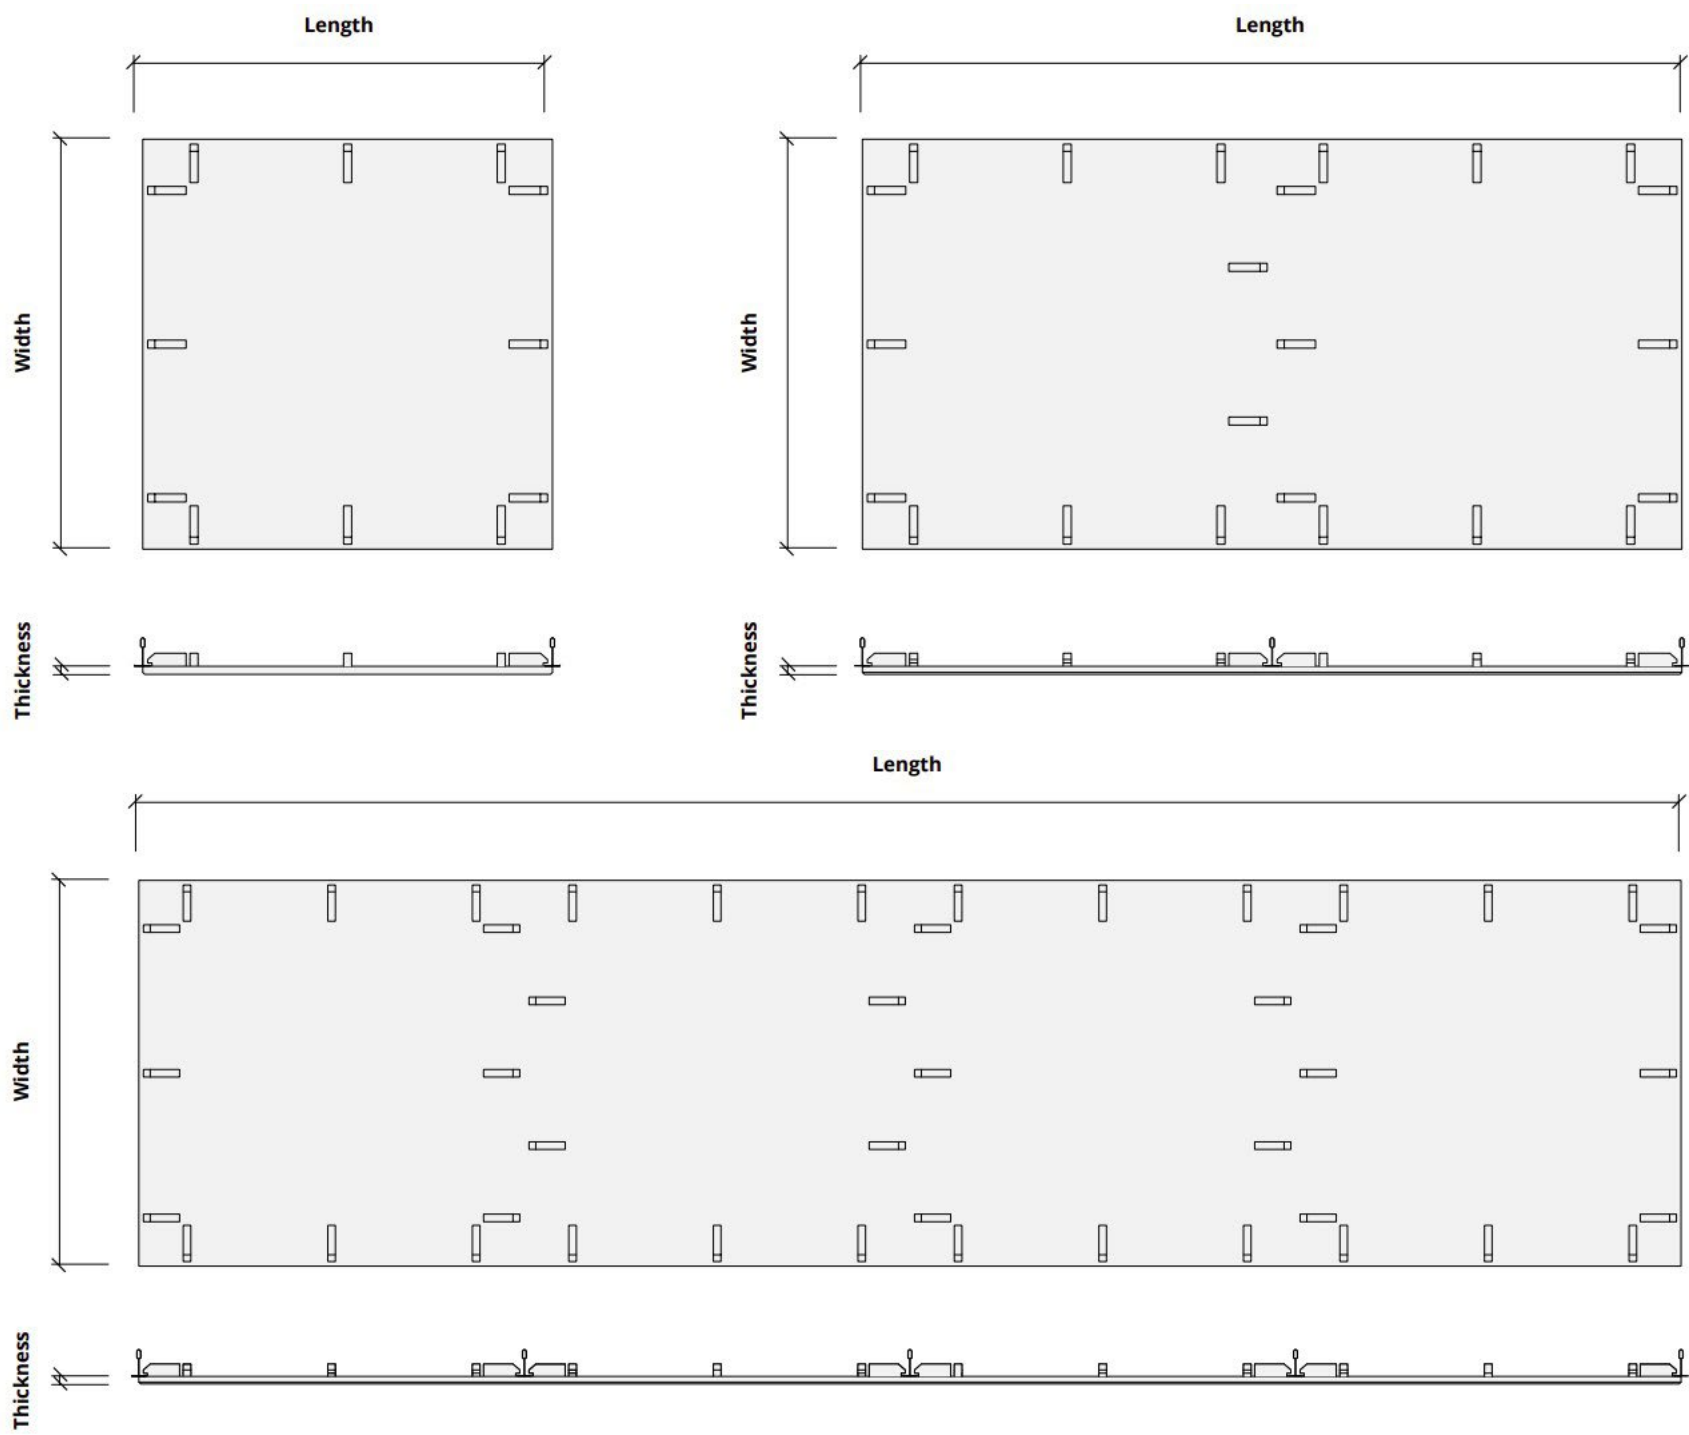

Note: for construction adhesive mounting method, panels will have a flush surface

Mounting Methods

Direct to 15/16" T-grid

