



Solid Ceiling Panels

12mm Product Detail

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Weight	2400gsm
Thickness	12mm +/- 10%
Dimensions	1220 x 2800mm Custom size available upon request

Sustainability



Made from 60% min. recycled content



Declare Red List Free (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



12mm Technical Data

Fire test method	EN 13501-1: 2019
Classification	B-s1, d0
Water vapour method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness test method	ISO 105-B02
Rating	6-7

Guarantees

Lead time	4-6 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years* *conditions apply

12mm Acoustic Performance

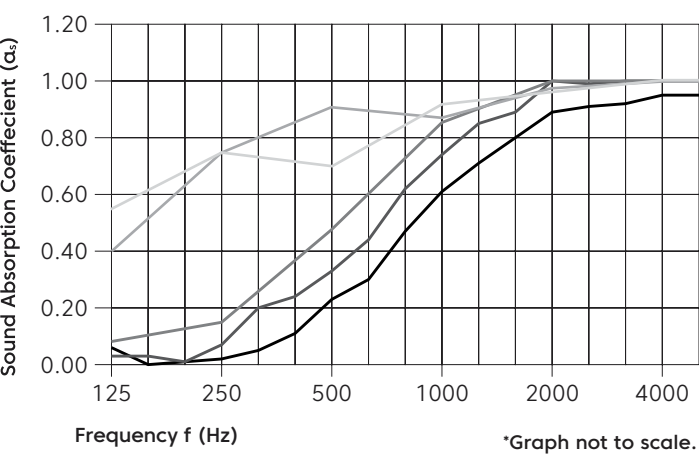
Test method
AS ISO 354-2006: Acoustic - Measurement of sound absorption in a reverberation room

Installation method

Method A
no air gap, 12mm air gap, 20mm air gap

Method E
E-200 200mm air gap,
E-400 400mm air gap

Rating method
ISO 11654-1997: Acoustic – sound absorbers for use in buildings – rating of sound absorption



	Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
	αs no air gap	0.06	0.02	0.23	0.61	0.89	0.95	0.45	Class E
	αs 12mm air gap	0.03	0.14	0.33	0.74	1.00	1.00	0.54	Class D
	αs 20mm air gap	0.05	0.16	0.48	0.85	1.00	1.00	0.64	Class D
	αs 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85	Class A
	αs 400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80	Class B

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.

24mm Product Detail

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Weight	2400gsm
Thickness	24mm +/- 10%
Dimensions	1220 x 2800mm Custom size available upon request

Sustainability



Made from 60% min. recycled content



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



24mm Technical Data


Fire test method	EN 13501-1: 2019
Classification	B-s2, d0
Total VOC result	≤ 0.5mg/m³
Colourfastness test method	ISO 105-B02
Rating	6-7

Guarantees

Lead time	4-6 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years* *conditions apply

24mm Acoustic Performance























Test method	ASTM E795-16: Standard Practices for Mounting Test Specimens During Sound Absorption Tests
Installation method	A, tested with no air gap
Rating method	ISO 11654-1997 Acoustic – sound absorbers for use in buildings – rating of sound absorption
Test results	NRC 0.60 no air gap 0.50 (LH) aw, Class D

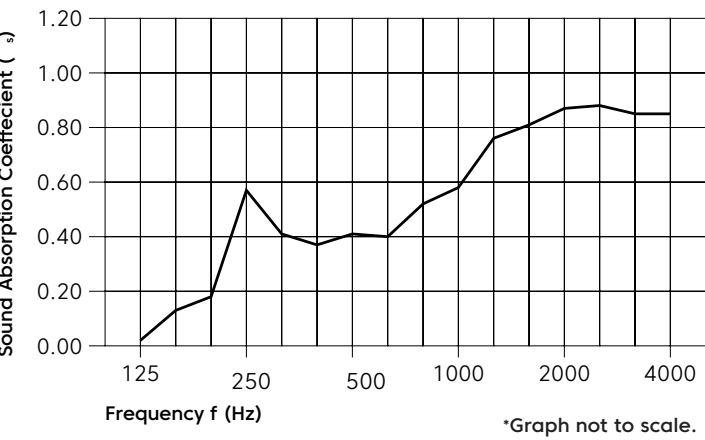

	Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
	αs	0.02	0.57	0.41	0.58	0.87	0.85	0.60	Class D

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.


Premier Colourways

										
Peppercorn PE22	Currant CU59	Carrot CA08	Peach PE19	Mushroom MU75	Valentine VA70	Turmeric TU60	Wheat WH68	Kale KA12	Oregano OR18	Sencha SE58
										
Celery CE65	Eucalyptus EU71	Nori NO76	Pistachio PI25	Midnight MI16	Flint FL64	Granite GR62	Denim DE09	Loganberry LO77	Azure AZ05	Marine MA15
										
Stonewash ST72	Periwinkle PE23	Sea Salt SE57	Shiraz SH63	Piano Black PI24	Charcoal CH01	Slate SL27	Grey GR02	Platinum PL04	Milkyway MI74	Walnut WA56
										
Umber UM54	Amethyst AM69	Quartz QU67	Almond AL55	Ivory IV11	Pearl PE21	White WH12				


Can't find a colour?
We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.

Mounting Methods

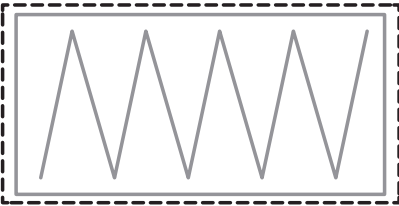Adhesive Method





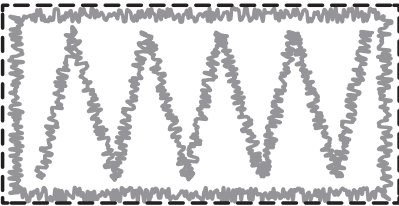- Panel installation area
- Construction adhesive



- Panel installation area
- Spray adhesive

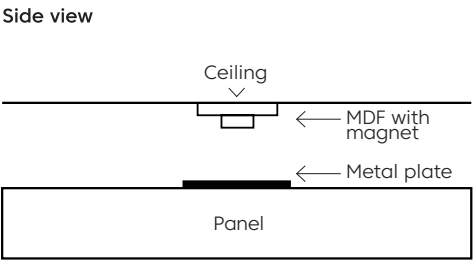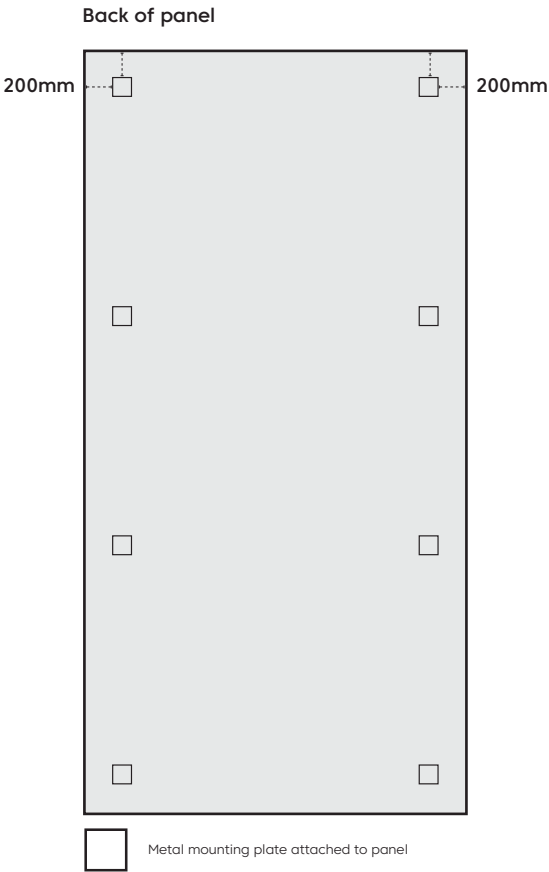Pot Magnet Method



Pot Magnet

