

acoufelt
making quiet



Canopy
Ceiling Clouds

Product Detail

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min
Weight	7.92kg/m ² +/- 10%
Thickness	12mm +/- 10%
Dimensions	1100 W x 1100 L x 50mm H 1100 W x 2400 L x 50mm H <i>Custom Sizes upon request</i>

Sustainability



Made from 60% min. recycled content



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end-of-life



Declare Approved (3PV) for FilaSorb Printed Panels



Indoor Advantage Gold Certified.



Technical Data

Fire test method	EN 13501-1: 2019
Classification	B-s1, d0
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness test method	ISO 105-B02
Rating	6-7

Guarantees

Lead Time	6-8 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years*

*conditions apply

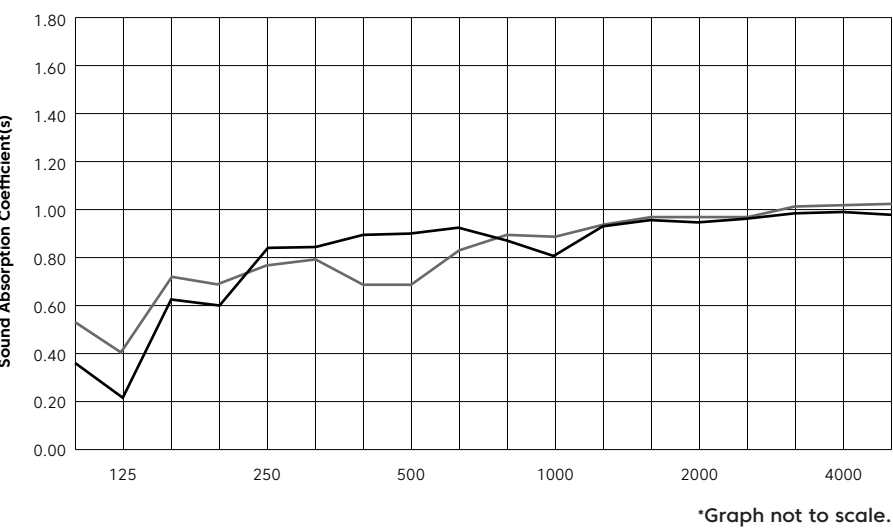
Acoustic Performance

Test method
AS ISO 354-2006: Acoustic - Measurement of sound absorption in a reverberation room

Installation method
Type “E-200” Mounting, tested with 200mm air gap
Type “E-400” Mounting, tested with 400mm air gap

Rating method
ISO 11654-1997: Acoustic – sound absorbers for use in buildings – rating of sound absorption

Test results
NRC 0.85 200mm air gap | aw 0.90 200mm air gap, Class A
NRC 0.80 400mm air gap | aw 0.80 400mm air gap, Class B



	Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
	200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85	Class A
	400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80	Class B


Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.

Canopy Profile 1

Sizes

Standard Height	1100mm
Standard Lengths	2400mm <i>Custom sizes available</i>
Thickness	12mm

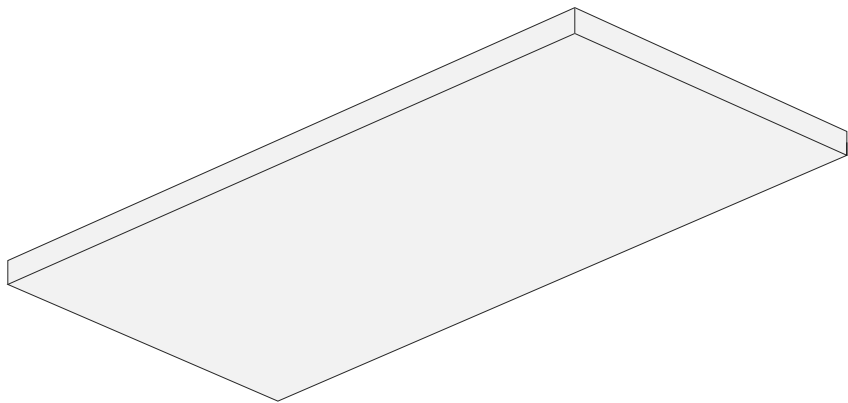
Perspective




12mm thickness



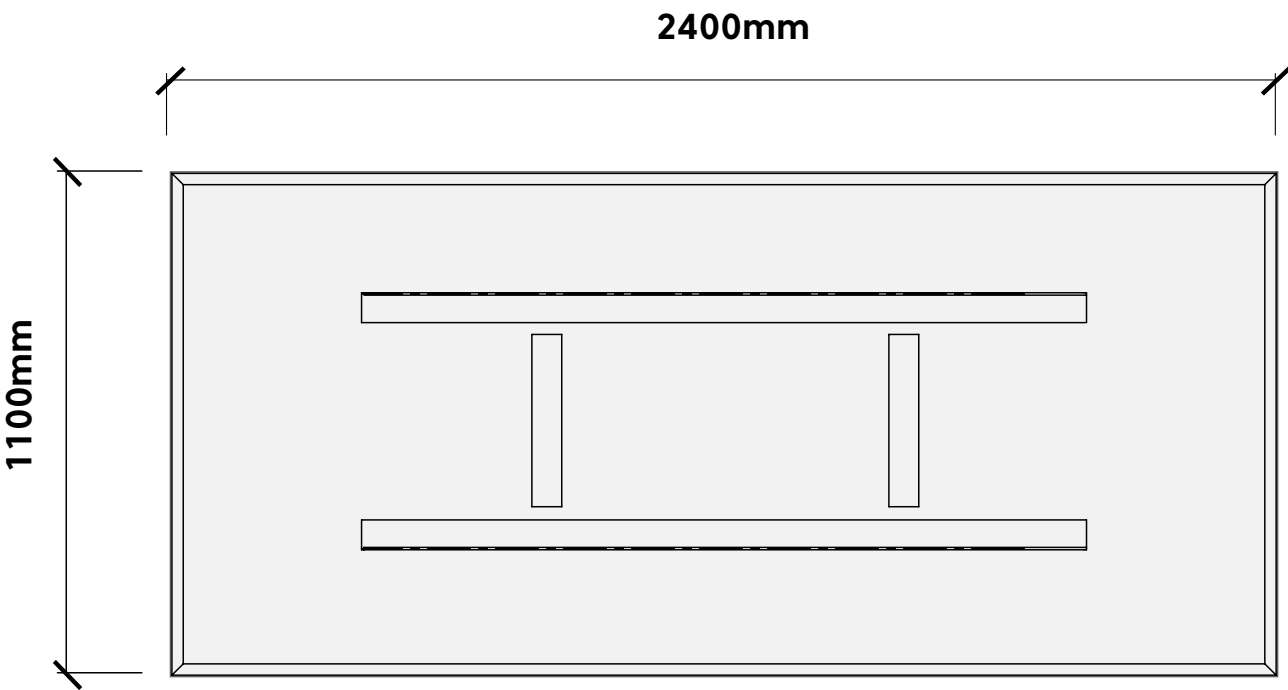Plan



Hardware Spacing

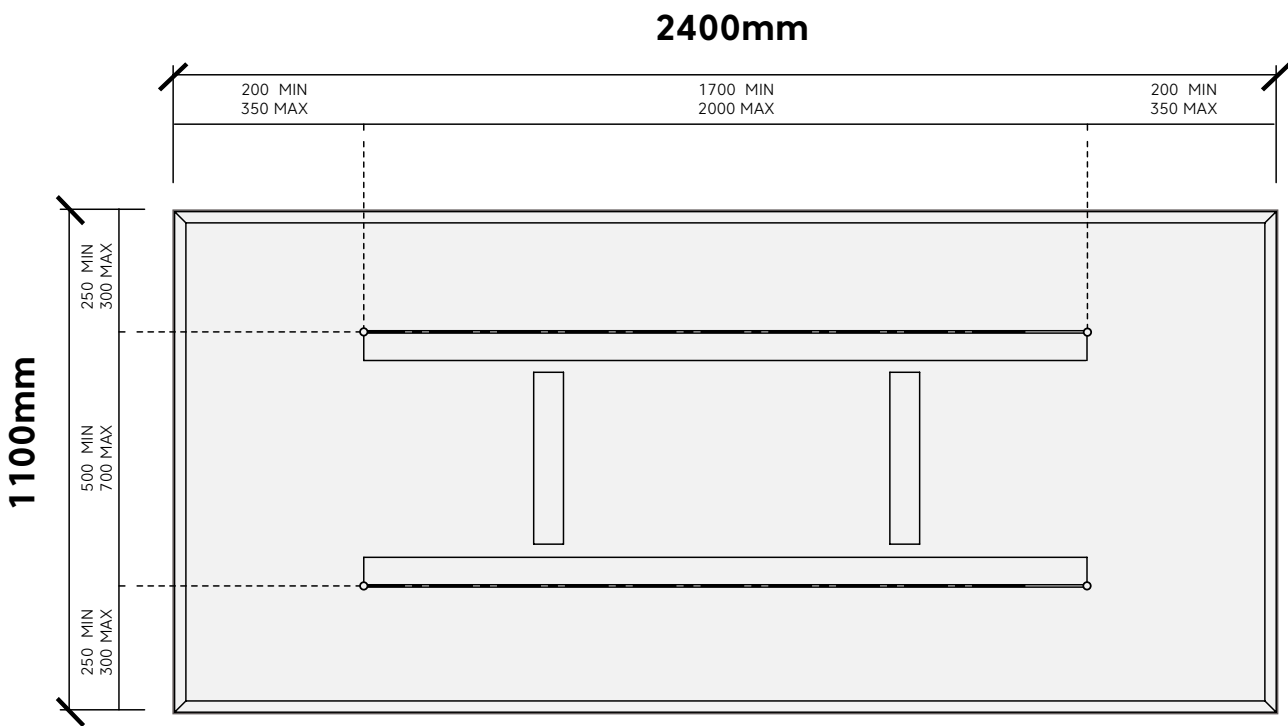


Canopy Profile 2

Sizes

Standard Height	1100mm
Standard Lengths	1100mm <i>Custom sizes available</i>
Thickness	12mm

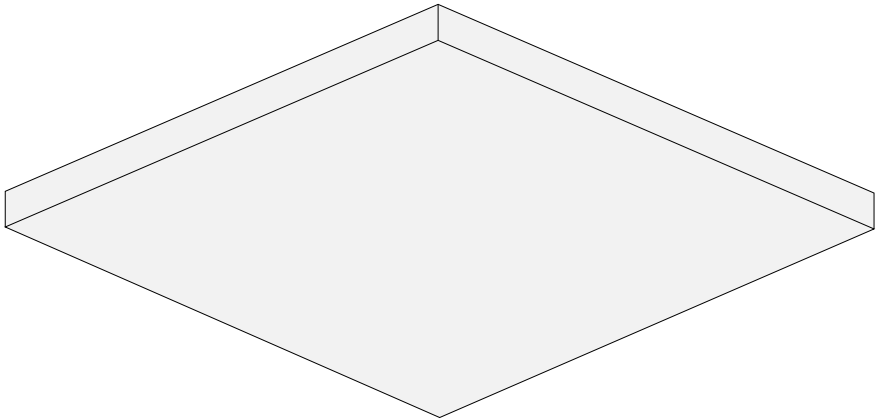
Perspective




12mm thickness




















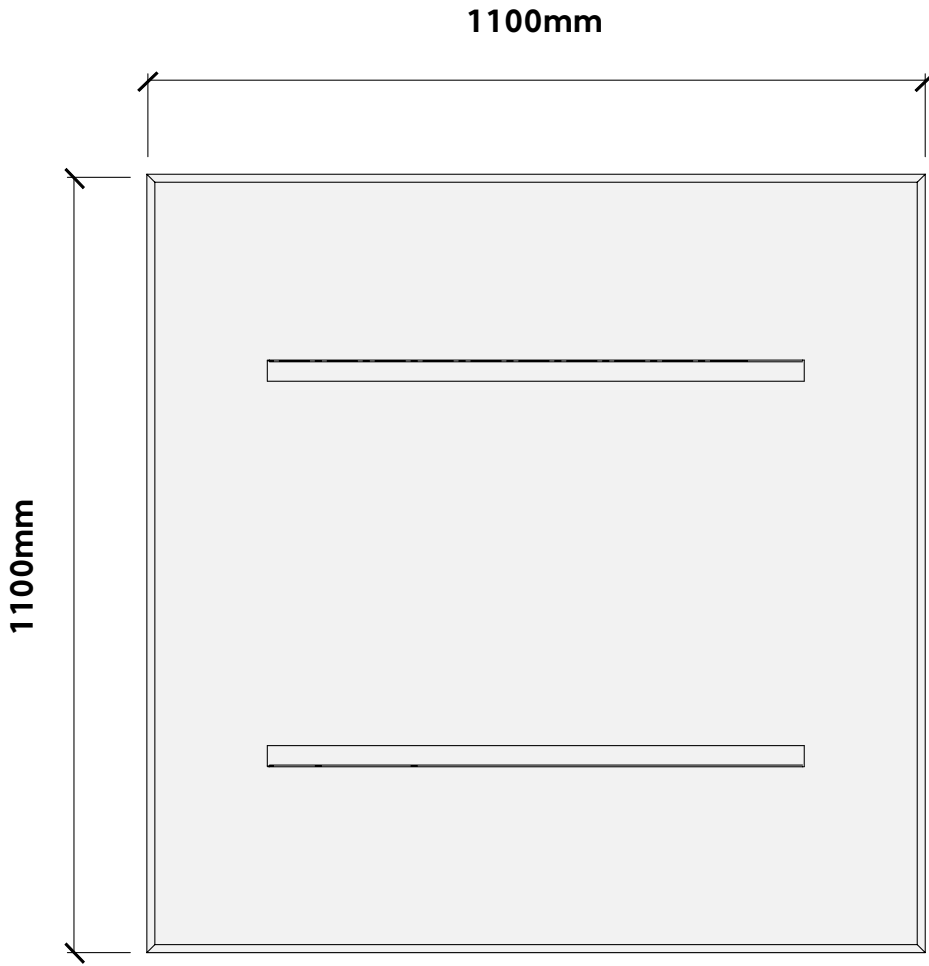
Plan



Hardware Spacing

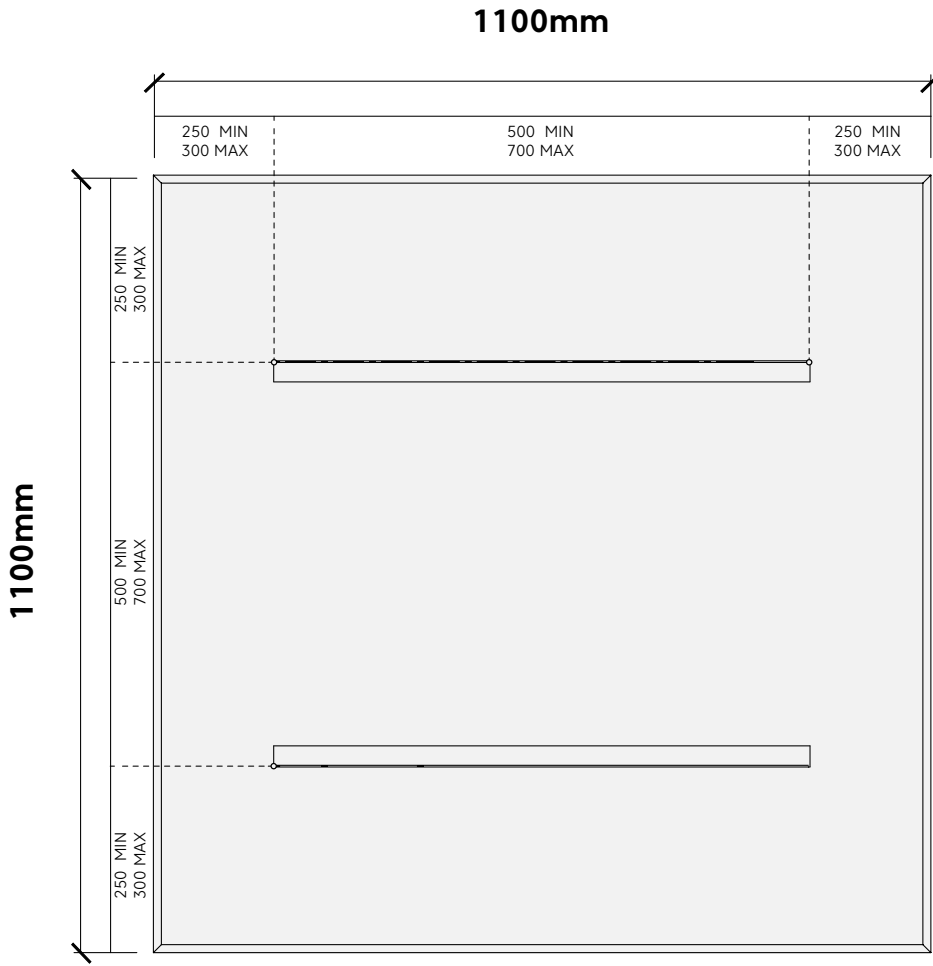

Premier Colourways

										
Peppercorn PE22	Currant CU59	Carrot CA08	Peach PE19	Mushroom MU75	Valentine VA70	Turmeric TU60	Wheat WH68	Kale KA12	Oregano OR18	Sencha SE58
										
Celery CE65	Eucalyptus EU71	Nori NO76	Pistachio PI25	Midnight MI16	Flint FL64	Granite GR62	Denim DE09	Loganberry LO77	Azur AZ05	Marine MA15
										
Stonewash ST72	Periwinkle PE23	Sea Salt SE57	Shiraz SH63	Piano Black PI24	Charcoal CH01	Slate SL27	Grey GR02	Platinum PL04	Milkyway MI74	Walnut WA56
										
Umber UM54	Amethyst AM69	Quartz QU67	Almond AL55	Ivory IV11	Pearl PE21	White WH12				

Can't find a colour?
We are constantly updating our palette, which includes adding and discontinuing certain colour lines. If you can't find the colour you are looking for, please contact us with your colour request, as we may still have stock available.

WoodGrain Prints



Picket Fence
WQ01



Boat Shed
WQ02



Wine Barrel
WQ03



Log Cabin
WQ04



Barn Door
WQ05



Loft
WQ06



White Elm
WQ07



French Bobbin
WQ08



Charred Larch
WQ09



Boardwalk
WQ10



Antique Chest
WQ11



Baltic Birch
WQ12



White Oak
WQ13



Weathered Slate
WQ14



Nordic Plank
WQ15



Natural Oak
WQ16



European Larch
WQ17



Teak
WQ18



Fumed Oak
WQ19



Black Walnut
WQ20



Driftwood
WQ21



Woodland Fog
WQ22



Petrified Ash
WQ23



Mountain Lodge
WQ24



Mocha Legno
WQ25



Scorched Timber
WQ26



Espresso Oak
WQ27



Shadow Oak
WQ28



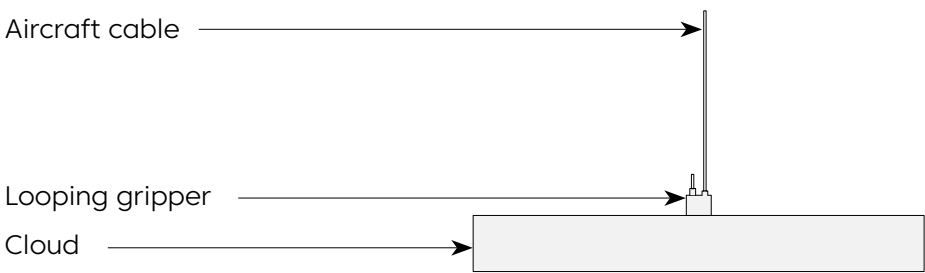
Knotty Spruce
WQ29




Lyed Larch
WQ30

Mounting Methods


Cable



Cable to deck

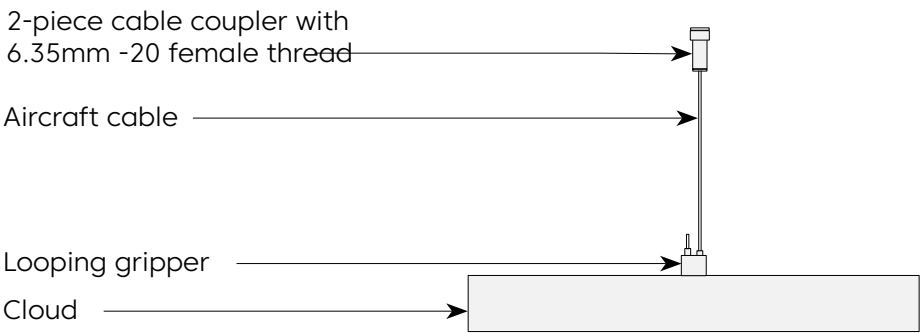

Cable to T-grid

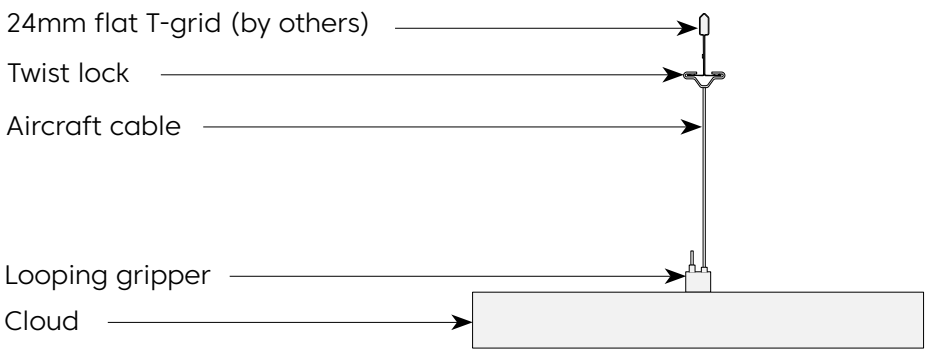

Cable to Unistrut

