



Cover, Staple

Specifications

Application	Ceiling
Composition	100% polyester
Material	FilaSorb™
Recycled content	60% min. rPET
Weight	0.49 lb./ft2 (±10%) 0.98 lb./ft2 (±10%)
Standard Sizes	24" W x 24" L 24" W x 48" L

Sustainability



Made from 60% min. recycled content



Declare Red List Free (3rd Party Verified)



Generated using 40% solar energy



Recyclable at end of lifespan



Total VOC's less than 0.5 mg/m³ (3rd Party Verified)



Technical Data

Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water vapour sorption method	ASTM C1104-2019 (Procedure A Modified)
Water sorbed by weight	0.20% (results based on a 12mm thick panel)
Total VOC test method	SCS-EC10.3-2014 v4.0 meeting standard CDPH/EHLB Standard Method v.1.2-2017
Total VOC result	≤ 0.5mg/m ³
Colourfastness Rating	ISO 105-B02 6-7

Details


Lead time	6-8 weeks
Origin	United Kingdom
Warranty against defects	20 years*
Colourfastness warranty	20 years*

*Conditions apply

Acoustic Performance

Test method	ASTM C423-09a
Installation method	A
Rating method	AS ISO 11654 -2002: Acoustics - rating of sound absorption - material and sytems

Test results
12mm
0.45
24mm
0.60

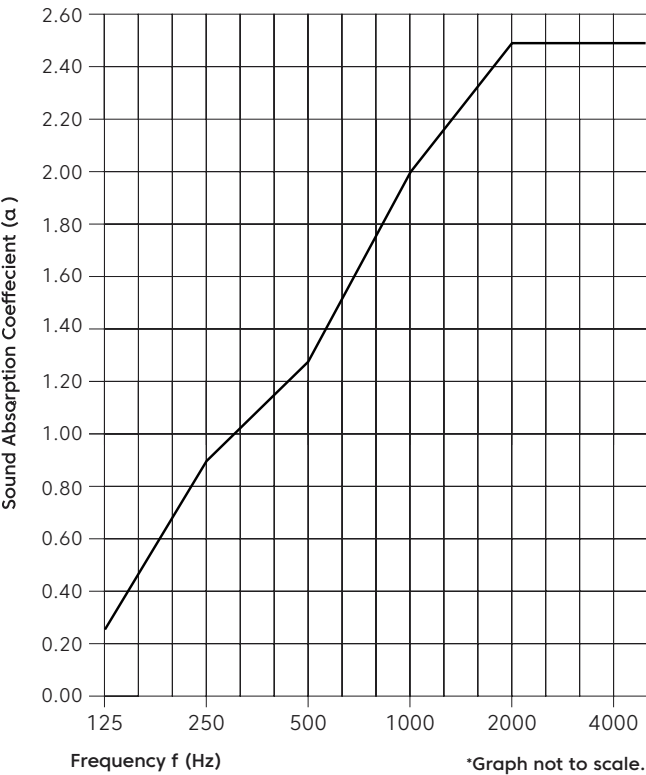

Frequency (Hz)	125	250	500	1000	2000	4000	NRC	Class Rating
α _s	0.26	0.86	1.25	2.02	2.49	2.49	1.65	Class A

Performance Indices: **Noise Reduction Coefficient (NRC)** results represent the absorption coefficients measured at the one third octaves bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customisation of installation of the product could alter the results.

WoodGrain Prints



Picket Fence
WQ01



Boat Shed
WQ02



Wine Barrel
WQ03



Log Cabin
WQ04



Barn Door
WQ05



Loft
WQ06



White Elm
WQ07



French Bobbin
WQ08



Charred Larch
WQ09



Boardwalk
WQ10



Antique Chest
WQ11



Baltic Birch
WQ12



White Oak
WQ13



Weathered Slate
WQ14



Nordic Plank
WQ15



Natural Oak
WQ16



European Larch
WQ17



Teak
WQ18




Fumed Oak
WQ19



Black Walnut
WQ20



Driftwood
WQ21



Woodland Fog
WQ22



Petrified Ash
WQ23



Mountain Lodge
WQ24



Mocha Legno
WQ25



Scorched Timber
WQ26



Espresso Oak
WQ27



Shadow Oak
WQ28



Knotty Spruce
WQ29



Lyed Larch
WQ30

Sizes


Standard Sizes

24" W x 24" L
24" W x 48" L


Thickness

1/2", 12mm (±10%)
1", 24mm (±10%)

Plan

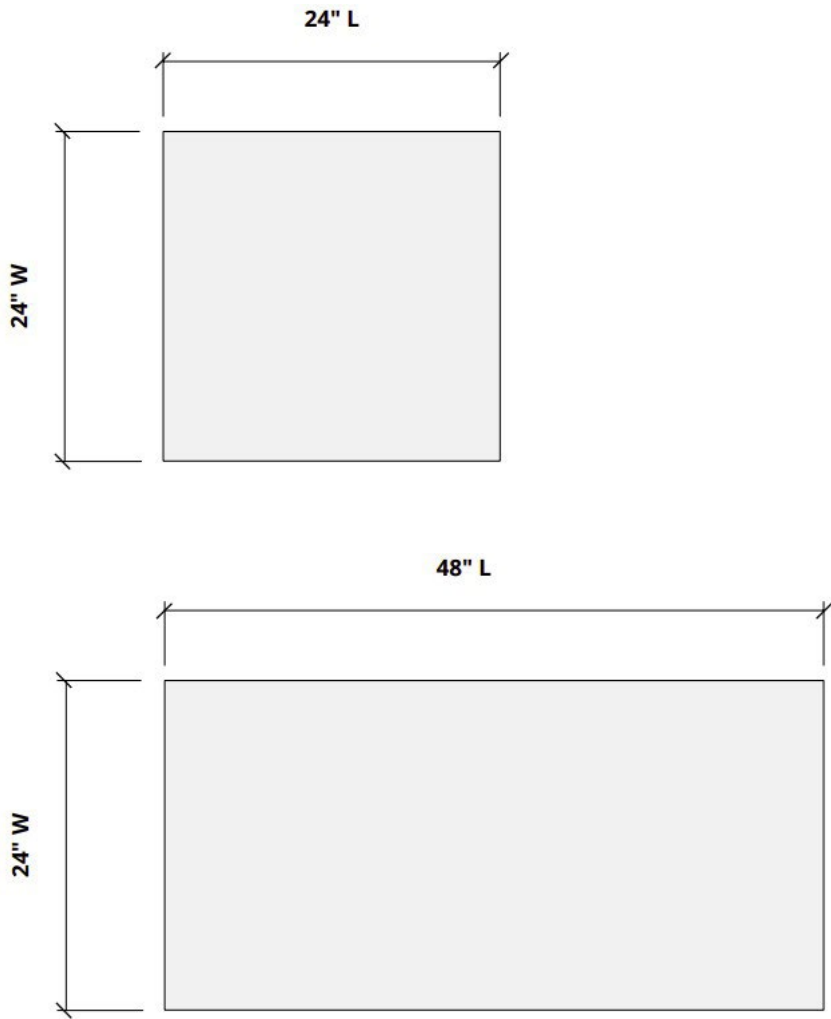

Perspective

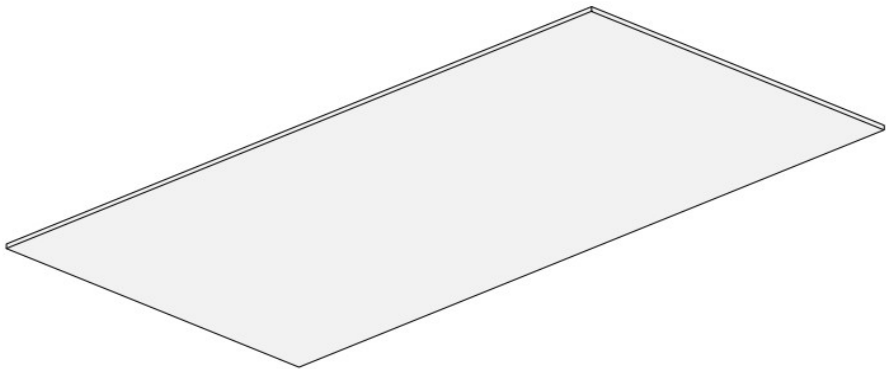

12mm
thickness



24mm
thickness



Mounting Methods

